



GAMMON TECHNICAL PRODUCTS, INC.
P.O. BOX 400 - 2300 HWY 34
MANASQUAN, N.J. 08736

PHONE 732-223-4600
FAX 732-223-5778
EMAIL gammontech@gammontech.com


**HIGH PRESSURE
MEMBRANE
TESTER**

**BULLETIN 127
(7-08)**

HIGH PRESSURE MEMBRANE TESTER

PERFORMS FUEL TESTS TO ASTM D2276 AT PRESSURES UP TO 450 PSI

- STAINLESS STEEL HOUSING AND VALVES
- INCLUDES GROUNDING AND BONDING HOSE, AND ASTM COLOR RATING BOOK

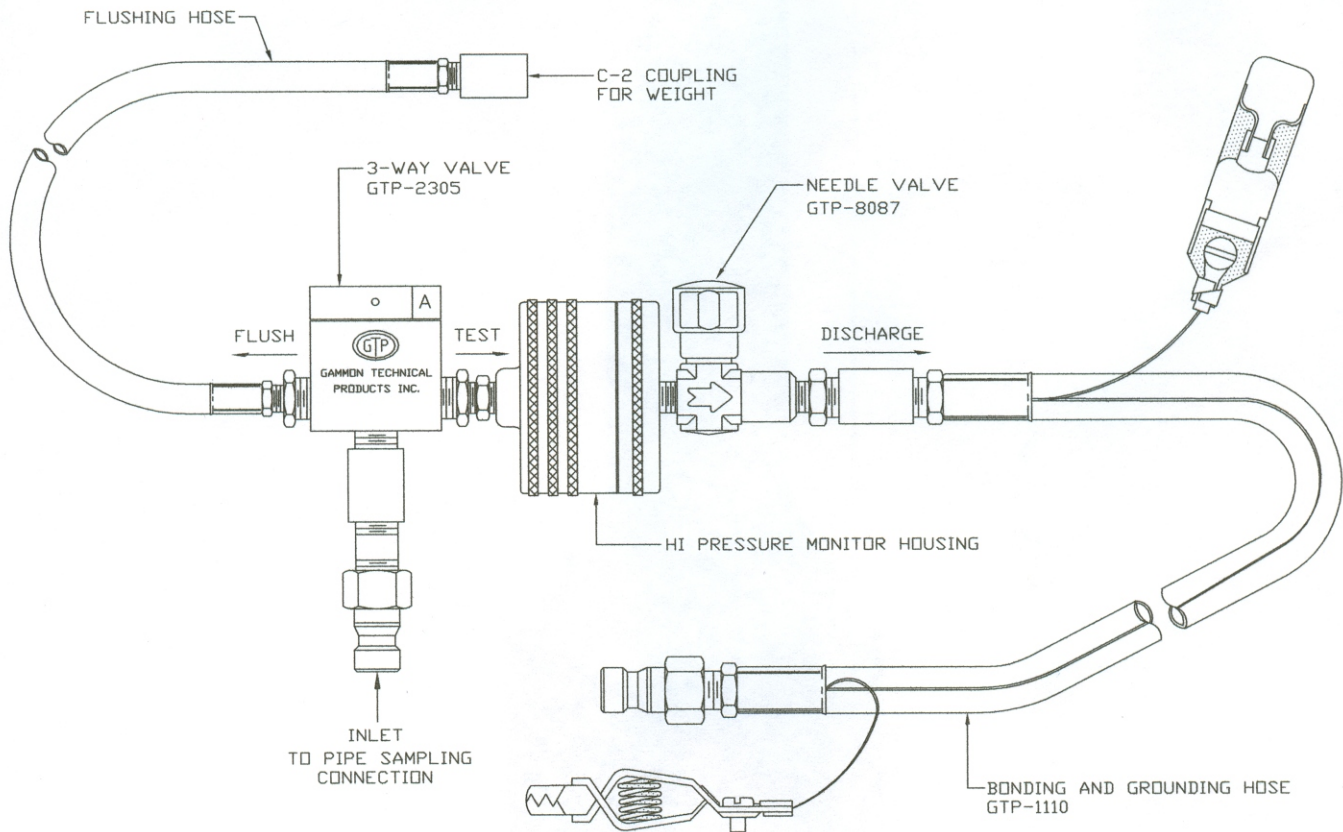

ASSEMBLY PART NUMBER GTP-3318-100

Jet fuel particulate contamination testing is performed to ASTM D2276 and IP-216. Conventional equipment on the market is not suitable for high pressures. This is because the plastic monitor is only rated for 100 psi. We have found a way to design a housing which allows testing using standard plastic monitors at up to 450 psi.

See Bulletin 73 for replacement membranes and backup pads. For testing at pressures below 100 psi, see Bulletin 8. For pressure up to 600 psi: Order GTP-3318-200.